

DEPARTMENT OF PERMITTING, ENVIRONMENT, AND REGULATORY **AFFAIRS (PERA)** 

BOARD AND CODE ADMINISTRATION DIVISION

# NOTICE OF ACCEPTANCE (NOA)

PRODUCT CONTROL SECTION 11805 SW 26 Street, Room 208 Miami, Florida 33175-2474 T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/pera

**MIAMI-DADE COUNTY** 

Regency Plus, Inc. 1024 Locust Gap Highway **Mount Carmel, PA 17851** 

### SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County PERA -Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. PERA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code. This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series "5108" White PVC Fixed Window - L.M.I.

APPROVAL DOCUMENT: Drawing No. RPLS0060, titled "Impact 5108 Series Fixed Window" sheets 1 through 5 of 5, dated 09/16/08, with revision B dated 02/07/12, prepared by PTC, LLC, signed and sealed by Robert J. Amoruso, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

# MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

**LABELING:** Each unit shall bear a permanent label with the manufacturer's name or logo, city, state, model/series, and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official. This NOA revises NOA # 08-1021.04 and consists of this page 1 and evidence pages E-1 and E-2, as well as approval document mentioned above.

The submitted documentation was reviewed by Manuel Perez, P.E.

(MIAMIDADE COUNTY)

NOA No. 12-0223.07 Expiration Date: January 28, 2014 Approval Date: April 19, 2012 Page 1

## Regency Plus, Inc.

# NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

### A. DRAWINGS

- 1. Manufacturer's die drawings and sections.
- 2. Drawing No. RPLS0060, titled "Impact 5108 Series Fixed Window" sheets 1 through 5 of 5, dated 09/16/08, with revision B dated 02/07/12, prepared by PTC, LLC, signed and sealed by Robert J. Amoruso, P.E.

### B. TESTS

- 1. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
  - 2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
  - 3) Water Resistance Test, per FBC, TAS 202-94
  - 4) Large Missile Impact Test per FBC, TAS 201-94
  - 5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
  - 6) Forced Entry Test, per FBC 2411 3.2.1, TAS 202-94

along with marked-up drawings and installation diagram of a series 5108 fixed window, prepared by National Certified Testing Laboratories, Test Report No. NCTL-110-11363-1, dated 05/15/08, signed and sealed by Harold E. Rupp, P.E. (Submitted under previous NOA#08-1021.04)

### C. CALCULATIONS

- 1. Anchor verification calculations and structural analysis prepared by PTC, LLC, complying with FBC-2007, dated 09/15/08, signed and sealed by Paul E. Winter, P.E. (Submitted under previous NOA#08-1021.04)
- 2. Glazing complies with ASTM E1300-04

### D. QUALITY ASSURANCE

1. Miami-Dade Department of Permitting, Environment, and Regulatory Affairs (PERA)

## E. MATERIAL CERTIFICATIONS

- 1. Notice of Acceptance No. 11–0624.01 issued to E.I. DuPont DeNemours & Co., Inc. for their "DuPont Butacite® PVB Interlayer" dated 09/08/11, expiring on 12/11/16.
- 2. Notice of Acceptance No. 07-1016.05, issued to Dominion Plastics, Inc., for their White Rigid PVC Exterior Extrusions, approved on 11/15/07, expiring on 10/24/12.

Manuel Perez, P.E.
Product Control Examiner
NOA No. 12-0223.07

Expiration Date: January 28, 2014 Approval Date: April 19, 2012

# Regency Plus, Inc.

# NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

# F. STATEMENTS

- 1. Statement letter of conformance, complying with FBC-2010, and of no financial interest, dated February 07, 2012, signed and sealed by Robert J. Amoruso, P.E.
- 2. Laboratory code compliance statement, issued by National Certified Testing Laboratories for Test Report No. NCTL-110-11363-1, dated 05/15/08, signed and sealed by Harold E. Rupp, P.E.

(Submitted under previous NOA#08-1021.04)

### G. OTHER

1. Notice of Acceptance No. **08-1021.04**, issued to Regency Plus, Inc. for their Series 5108 PVC Fixed Window – L.M.I., approved on 01/28/09 and expiring on 01/28/14.

Manuel Perez, P.E.

Product Control Examiner
NOA No. 12-0233.07

Expiration Date: January 28, 2014 Approval Date: April 19, 2012

# REGENCY PLUS, INC. IMPACT 5108 SERIES FIXED WINDOW INSTALLATION ANCHORAGE DETAILS

### **GENERAL NOTES:**

- 1. THE PRODUCT ANCHORAGE SHOWN HEREIN IS DESIGNED TO COMPLY WITH THE 2007 AND 2010 FLORIDA BUILDING CODE (FBC) INCLUDING THE HIGH VELOCITY HURRICANE ZONE (HVHZ) AT THE DESIGN PRESSURES STATED HEREIN.
- 2. THE PRODUCT DETAILS CONTAINED HEREIN ARE BASED UPON SIGNED AND SEALED TEST REPORT # NCTL-110-11363-1 DATED 05/15/08 AND ASSOCIATED LABORATORY STAMPED DRAWINGS AND WERE TESTED IN ACCORDANCE WITH CURRENT DADE COUNTY PROTOCOLS.
- 3. THE PRODUCT HAS BEEN EVALUATED FOR CONFORMANCE
  TO THE STANDARDS LISTED IN THE 2007 AND 2010
  FLORIDA BUILDING CODE (FBC) AND IS IN COMPLIANCE
  WITH SAID STANDARDS, INCLUDING HIGH VELOCITY
  HURRICANE ZONE (HVHZ) REQUIREMENTS.
- 4. ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE MASONRY AND 2X FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE STRUCTURE IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD.
- 5. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD.
- 6. THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, THEN THE BUILDING OFFICIAL MAY ELECT ONE OF THE FOLLOWING OPTIONS:
  - A. OUTSIDE HVHZ: REQUIRE THAT A LICENSED ENGINEER OR ARCHITECT PREPARE AND SUBMIT SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.
  - B. INSIDE HVHZ: REQUIRE THAT A ONE-TIME SITE SPECIFIC APPROVAL BE APPLIED FOR AND OBTAINED FROM THE MIAMI-DADE COUNTY PRODUCT CONTROL DIVISION.

- 7. THIS PRODUCT DOES NOT REQUIRE THE USE OF A DADE COUNTY APPROVED IMPACT SYSTEM.
- 8. WINDOW FRAME MATERIAL: WHITE RIGID PVC (NOA # 07-1016.05)
- 9. GLASS MEETS THE REQUIREMENTS OF ASTM E1300-04e1. SEE SHEET 3 FOR GLAZING DETAIL.
- DESIGNATION "O" STANDS FOR THE FOLLOWING:
   FIXED PANEL
- 11. A 1/3 INCREASE IN ALLOWABLE STRESS FOR WIND LOADS WAS NOT USED IN THE DESIGN OF THE PRODUCT(S) SHOWN HEREIN. WIND LOAD DURATION FACTOR (Cd = 1.6) HAS BEEN USED FOR WOOD ANCHOR DESIGN.
- 12. EACH WINDOW ASSEMBLY SHALL BE LABELED WITH A PERMANENT LABEL AND/OR STAMP WITH THE EXTRUDER CODE AND "MDCA".

### INSTALLATION NOTES:

- I. ONE (1) INSTALLATION ANCHOR IS REQUIRED AT EACH ANCHOR LOCATION SHOWN.
- THE NUMBER OF INSTALLATION ANCHORS DEPICTED IS THE MINIMUM NUMBER OF ANCHORS TO BE USED FOR PRODUCT INSTALLATION.
- 3. SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM(S). MAXIMUM ALLOWABLE SHIM SIZE IS 1/4 INCH. SHIM WHERE SPACE OF 1/16 INCH OR GREATER OCCURS. SHIM(S) SHALL BE CONSTRUCTED OF HIGH DENSITY PLASTIC OR BETTER.
- 4. FOR INSTALLATION INTO WOOD FRAMING, USE #12 WOOD SCREWS OF SUFFICIENT LENGTH TO ACHIEVE 1 1/2 INCH MINIMUM EMBEDMENT. MINIMUM EDGE DISTANCE IS 3/4 INCHES
- 5. FOR INSTALLATION THROUGH 1X BUCK TO CONCRETE / MASONRY, OR DIRECTLY INTO CONCRETE / MASONRY, USE 3/16 INCH ITW TAPCONS OF SUFFICIENT LENGTH TO ACHIEVE 1 1/4 INCH MINIMUM EMBEDMENT. MINIMUM EDGE DISTANCE IS 2 1/2 INCHES.
- INSTALLATION ANCHORS ARE TO BE LOCATED THROUGH PERIMETER OF NAILING FIN WHEN APPLICABLE.
- MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES, INCLUDING BUT NOT LIMITED TO STUCCO, FOAM, BRICK VENEER AND SIDING.

- 8. INSTALLATION ANCHORS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT COATING.
- FOR HOLLOW BLOCK AND GROUT FILLED BLOCK, DO NOT INSTALL INSTALLATION ANCHORS INTO MORTAR JOINTS. EDGE DISTANCE IS MEASURED FROM FREE EDGE OF BLOCK OR EDGE OF MORTAR JOINT INTO FACE SHELL OF BLOCK.
- 10. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BY THE ANCHOR MANUFACTURER.
- 11. INSTALLATION ANCHOR CAPACITIES FOR PRODUCTS
  HEREIN ARE BASED ON SUBSTRATE MATERIALS WITH
  THE FOLLOWING PROPERTIES:

A. WOOD - SOUTHERN YELLOW PINE - MINIMUM SPECIFIC GRAVITY OF 0.55.

B. CONCRETE -MINIMUM COMPRESSIVE STRENGTH OF 3192 psi.

C.MASONRY - STRENGTH CONFORMANCE TO ASTM C-90.

120			02/02		12/2/		- FAG
PROJECT #412-0120			UPDATE TO 2010 FBC		PER MIAMI-DADE 11-15-08		DESCRIPTION
				മ	<	<	REV
PLUS, INC.	, PA 17851	MPACT 5108 SERIES FIXED WINDOW	GENERAL NOTES, INSTALLATION NOTES & D.P. CHART	DRAWN BY: DATE: DQ/16/08	SCALE: DRAWING NO:	N.T.S. RPLS0060	REV: B SHEET: 1 OF 5
REGENCY PLUS, INC. 1024 LOCUST GAP HIGHM	1024 LOCUST GAP HIGHWAY MT. CARMEL, PA 17851		GENERAL NOTES, INSTALL	PREPARED BY:	28		12

Robert J. Amoruso, P.E. Florida P.E. No. 49752

Welter


PTC Product Design Group, LLC PO Box 529775 Longwood, FL 32752-0775 321-690-1788 info@ptc-corp.com FBPE Certificate of Authorization No. 25935

PRODUCT REVISED as complying with the Florida Building Code Acceptance No 12-0223.0 Expiration Date 180.28, 2014

Dade Product Contro

A		TABLE OF CONTENTS
SHEET	REV.	SHEET DESCRIPTION
1	В	GENERAL NOTES, INSTALLATION NOTES & D.P. CHART
2	В	ELEVATION AND ANCHOR LAYOUTS
3	В	HORIZONTAL & VERTICAL SECTIONS & GLAZING DETAIL - OPT. INSTALLATION
4	В	HORIZONTAL & VERTICAL SECTIONS - PARTING STOP INSTALLATION
5	В	COMPONENTS, BILL OF MATERIALS & CORNER SECTION

DESIGN PRESSURE RATING (PSF)	IMPACT RATING
±55.0 PSF	LARGE MISSILE IMPACT

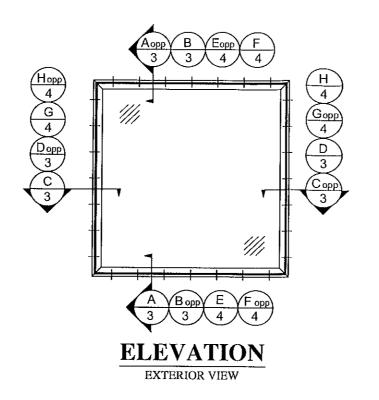

SMC

12/2/08

PER MIAMI-DADE 11-15-08

⋖

 $\mathbf{\omega}$ 

PROJECT #412-0120

REGENCY PLUS, INC.
1024 LOCUST GAP HIGHWAY
MT. CARMEL, PA 17851
IMPACT 5108 SERIES FIXED WINDOW
ELEVATION AND ANCHOR LAYOUTS


Robert J. Amoruso, P.E. Florida P.E. No. 49752

PTC Product Design Group, LLC


PO Box 520775


Longwood, FL 32752-0775 321-690-1788 info@ptc-corp.com FBPE Certificate of Authorization No. 25935


PRODUCT REVISED as complying with the Florida Building Code Acceptance No 12-0223.07 Expiration Date Jan. 28,2014

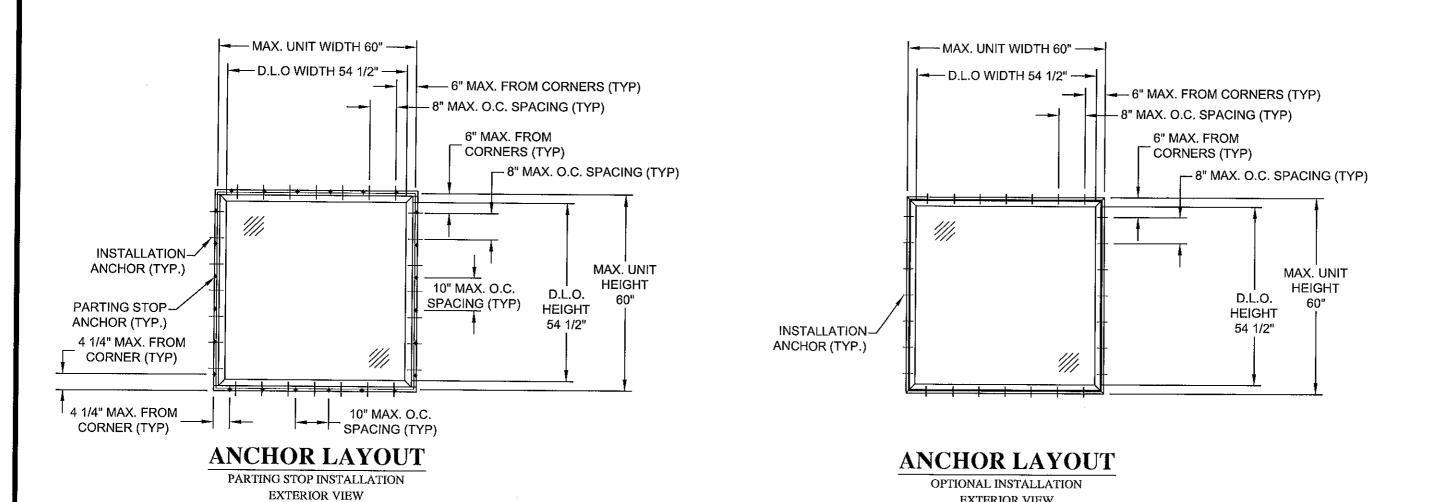


EXTERIOR VIEW

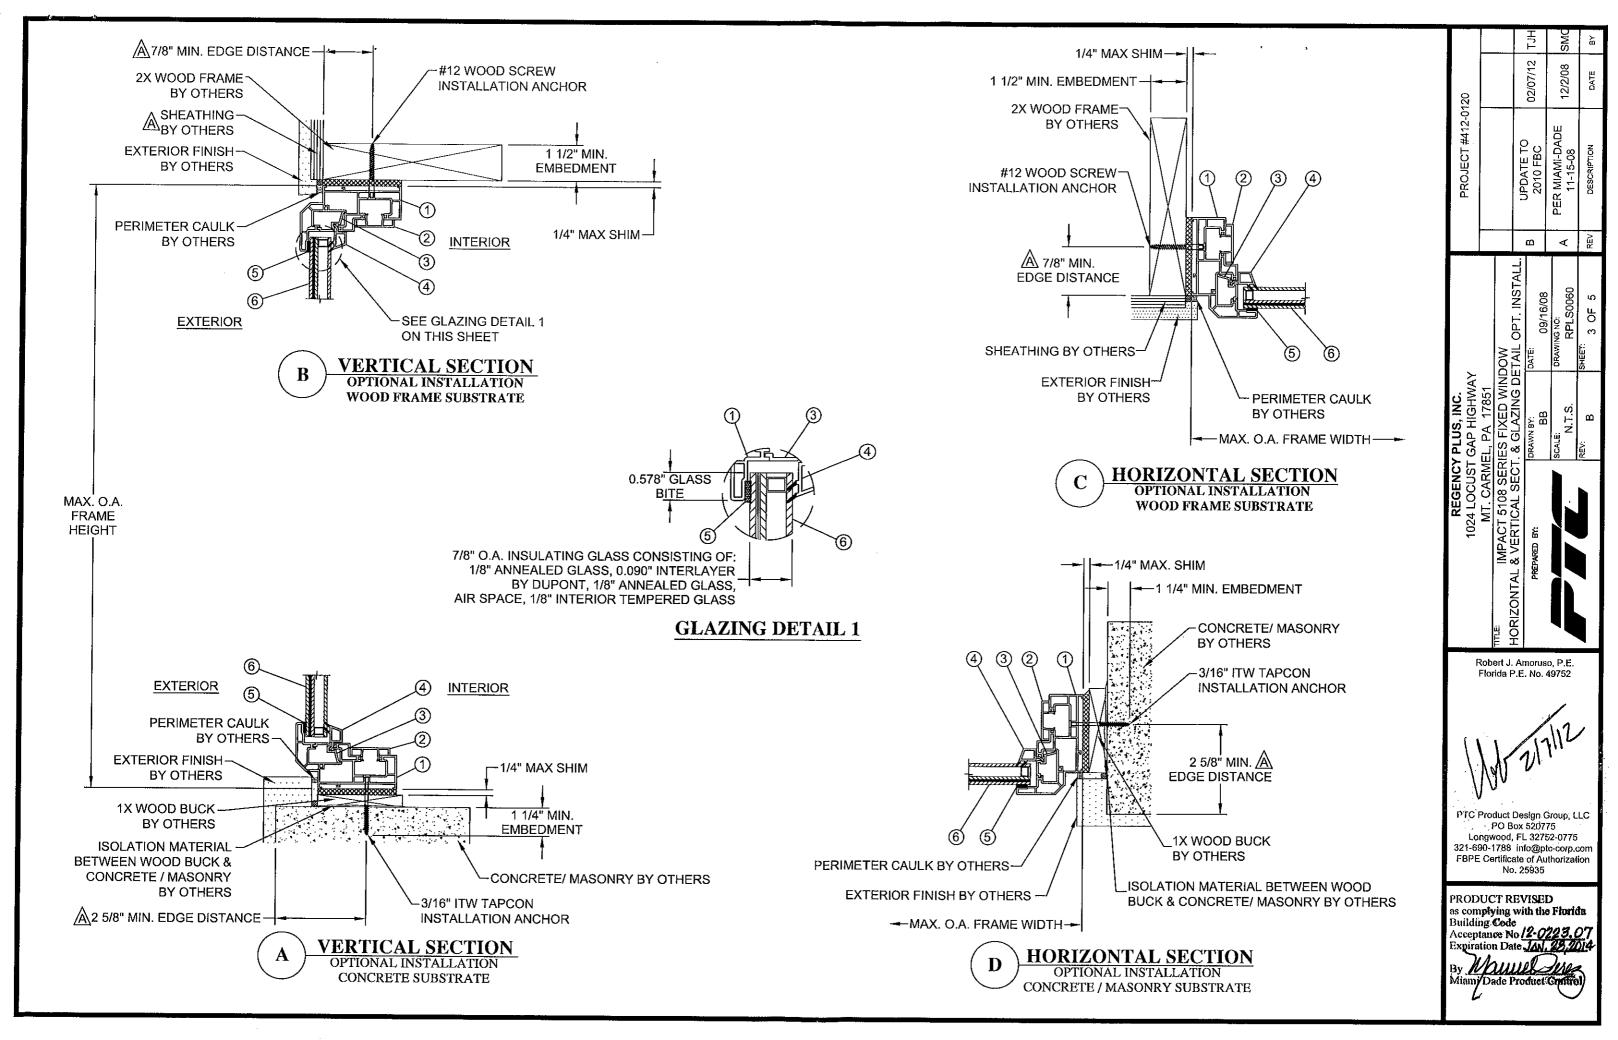

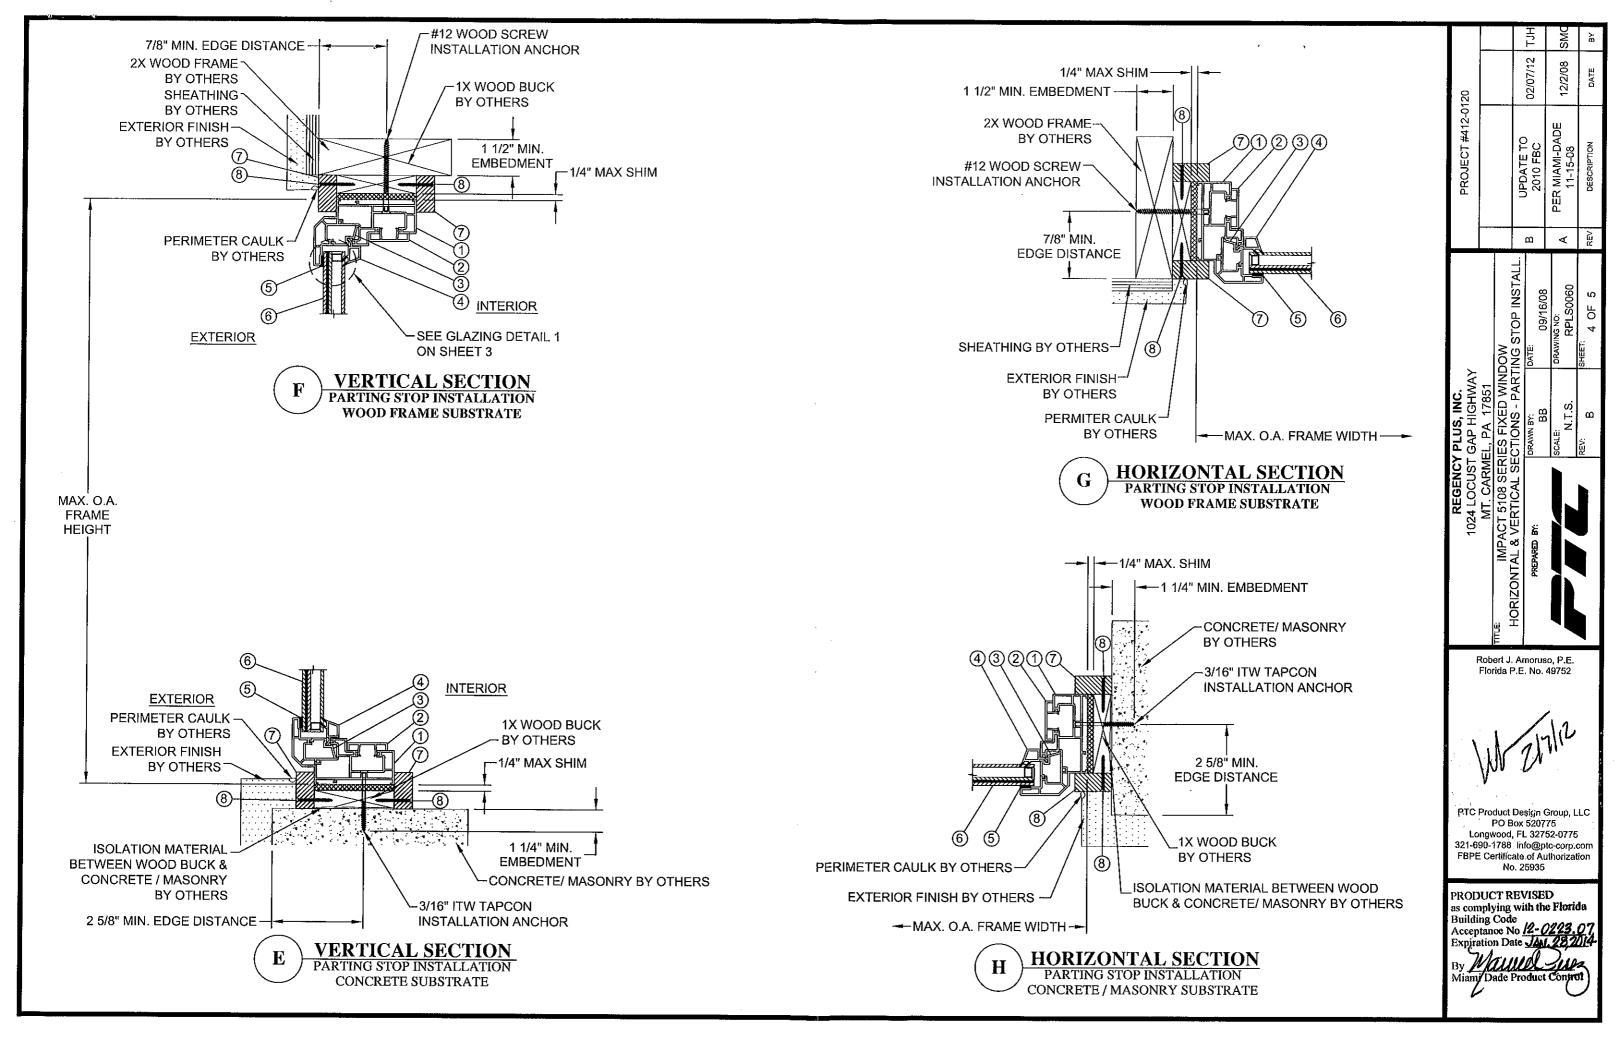

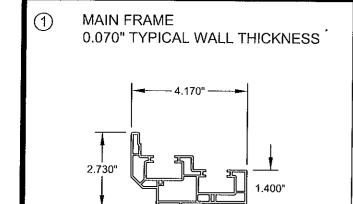


FRAME COVER 0.070" TYPICAL WALL THICKNESS




. ②

POCKET INSERT
 0.070" TYPICAL WALL THICKNESS




GLASS STOP 0.070" TYPICAL WALL THICKNESS





4

8	PARTING STOP



SYM#	PART#	DESCRIPTION	MATERIAL	MANUFACTURER
<u>A</u> 1	IV-1060	MAIN FRAME	WHITE RIGID PVC	DOMINION PLASTICS
<u>A</u> 2	IV-1070	FRAME COVER	WHITE RIGID PVC	DOMINION PLASTICS
<b>▲</b> 3	IV-1079	POCKET INSERT	WHITE RIGID PVC	DOMINION PLASTICS
<u>A</u> 4	IV-1103	GLASS STOP	WHITE RIGID PVC	DOMINION PLASTICS
5	IV-1070	SIKA FLEX 552 SILICONE BACK BEDDING	SILICONE	SIKA
6		7/8" O.A. INSULATING GLASS CONSISTING OF: 1/8" INTERIOR TEMPERED GLASS, AIR SPACE, 1/8" ANNEALED GLASS, 0.090" INTERLAYER BY DUPONT, 1/8" ANNEALED GLASS	GLASS	
<u>A</u> 7		1 1/2" X 3/4" PARTING STOP	WOOD	AR###
8		#6 X 1 5/8" SCREW	STEEL	

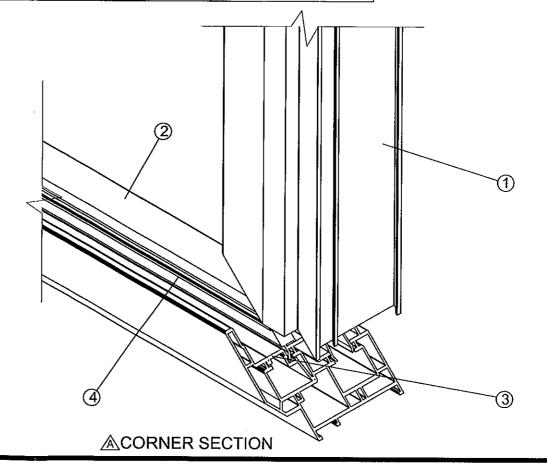



02/07/12

12/2/08

Walter

PTC Product Design Group, LLC PO Box 520775 Longwood, FL 32752-0775 321-690-1788 info@ptc-corp.com FBPE Certificate of Authorization No. 25935

PRODUCT REVISED as complying with the Florida Building Code Acceptance No 12-0223, 07 Expiration Date 141, 22, 2014

By Malle Sub-Miam Dade Product Control